

AQ900L



Large size wire cut EDM machine

- 10 year warranty on positioning accuracy
- Linear motor (X, Y, U, V axis)
- Linear glass scales (X, Y, U, V axis)
- Ceramic components
- Linear motor cooling unit
- LP33W high speed generator
- Intelligent Q³vic EDW
- Esprit CAM software offline*
- Remote controller
- Rise and fall work tank
- Work stand bridge
- Improved ease of operation
- High speed electrolysis free circuit
- SODICK Fine Corner Control
- Energy saving circuit
- Super PIKA finishing circuit
- FTII (Fine pick-up function)
- Automatic water level control
- Super jet AWT (Automatic wire threader)
- Wire end remover
- Wire chopper
- Receiver for max. 20 kg wire coils
- Dielectric cooling unit
- Active Power Restart (UPS)
- Voltage stabiliser
- LAN interface
- 15" TFT screen
- USB port
- Totalising hour metre
- Work light

Technical Specifications

Max. workpiece weight (kg)	3000
Max. workpiece dims (W x D x H, mm)	1200 x 900 x 400
X/Y/Z axis travel (mm)	900 x 600 x 400
U/V axis travel	920 x 620
Taper angle at 100 mm height	±30°
Wire diameter (mm)	ø 0.15 ~ ø 0.33
Wire tension (N)	3 ~ 23
Max. wire speed (mm/s)	420
Distance from floor to table top (mm)	1050
Controlled axis	5
Machine tool dimensions (W x D x H, mm)	2380 x 3150 x 2395
Machine installation dimensions (mm)	4685 x 5525 x 2780
Machine weight (kg)	8000

Options

Taper flex 45 (for taper cutting up to 45°)	JauchSchmider Rotary table (indexing or simultaneous movement)
Oscilloscope	Custom colour
WS4P/5P rotary table (indexing or simultaneous movement)	





* regional option



AQ900L

Side View

Front View

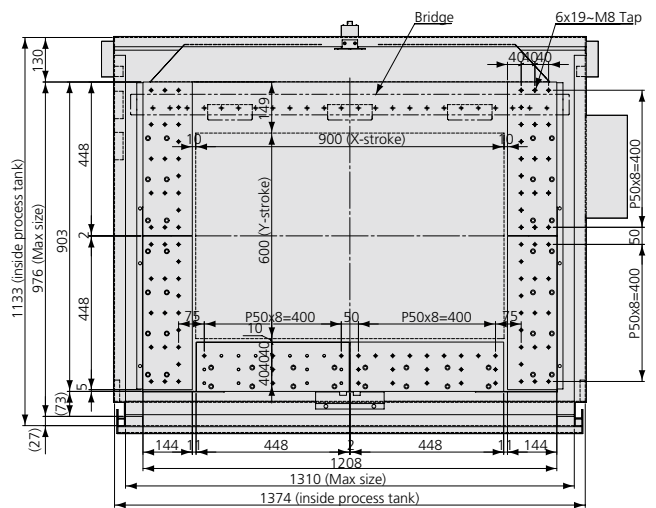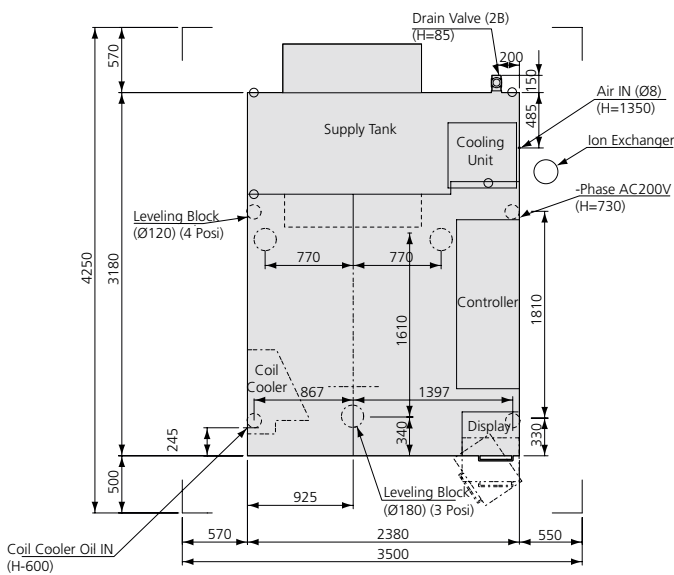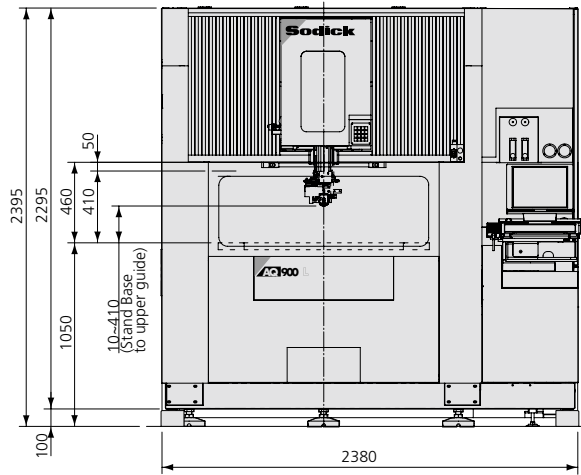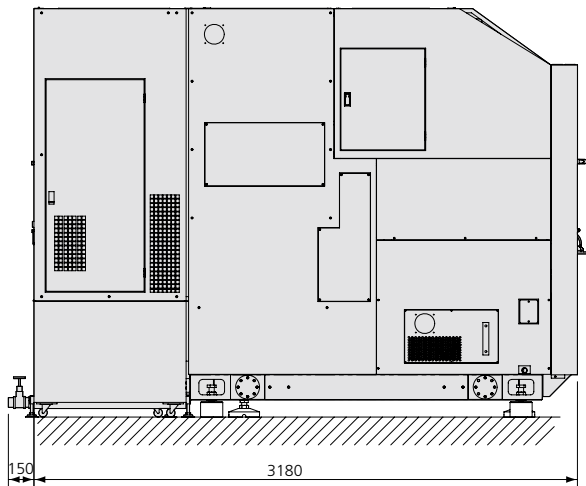

Top View

Work Table

Sodick

create your future

Sodick Europe Ltd.

Rowley Drive, Baginton
Coventry, CV3 4FG
United Kingdom

Phone +44 (0) 24 7621 4314
Fax +44 (0) 24 7630 5680

Sodick Contact

email europa@sodick.eu.com
online www.sodick.org