



Large Size Linear Wire-cut EDM

AQ750L

AQ1200L

AQ900L

AQ1500L



Sodick

The Premium



Linear Large Wire EDM Range

As a response to the growing demands for Large Wire EDM Machines resulting from the growth in Aerospace, Large Mold and Dies stimulated by the popularity of Large Flat Screen TV's and the growth in large Automotive Tooling; Sodick has expanded its range of Large Size Wire EDM Machines.

The AQ750L/900L/1200L/AQ1500L utilize the Linear Motor Technology developed and manufactured by Sodick to ensure smooth and accurate motion. The LP Control is capable of directly importing a 3D Model, therefore helping operators to achieve optimum productivity during the manufacturing process.

Linear Series



*Positioning Accuracy
10 years guarantee*



Utilising Linear Motor Drive Systems, Sodick Die-Sinker and Wire-Cut EDM Machines have enabled customers to achieve EDM machining standards that are not possible with conventional ball-screw type machines.

The Linear Motor Driven EDM Machines do not suffer the disadvantages associated with conventional ball screw type machines. The use of the Linear Motor System removes the deterioration of the machining accuracy due to Backlash and Lost Motion as a result of wear within the ball-screw assembly.

Sodick is so confident of the reliability and accuracy of their machines over the working life of the machine, that they are the only Manufacturer to offer a comprehensive 10 Year positioning accuracy guarantee on all of the Linear EDM Machines.

Five Core Technologies

Developed in-House Aiming At Manufacturing At The World's Highest Level.

Starting from the development of the electrical discharge circuits, Sodick has continued to pursue the highest possible level of accuracy, speed and efficiency of machining. As a result the technologies for the CNC Units, fine Ceramics, Linear Motors, Motion Controllers and the Electrical Discharge Power Supply have been established as the 5 Core Technologies of Sodick. Sodick's continuous research programme into these core areas and new technologies ensures Sodick remains at the forefront of EDM Machine producers.



Tech 1&2


CNC And Discharge Units

The AQ Wire EDM Range benefits from the 5th Generation Electrical Discharge Technology "LP2WH" which has adopted the "Perfect Active Control" enabling simultaneous control of the high-speed electrical discharge and axis movements by using serial communication technology of 1 Gbit/sec. 3D Solid Models from CAD can be transferred directly into the LP 3D Control and an optimized CNC Program can be generated within the Control, therefore dramatically reducing Set-Up times. The performance of the electrical discharge is ensured by an extensive library of Cutting Conditions Database for a wide range of materials and heights.

Tech 3&4

Linear Motor Drive and Motion Controller

Sodick's Linear Motor employs a direct drive vibration-free Drive System which has unrivalled acceleration and positioning accuracy without any backlash. Its high dynamic responsive performance, optimized for precision does not diminish over time and remains maintenance-free. The Linear Drive System Motors outstanding performance is controlled by the NC Unit in conjunction with the Sodick Motion Controller (K-SMC) which has been perfected over a number of years.

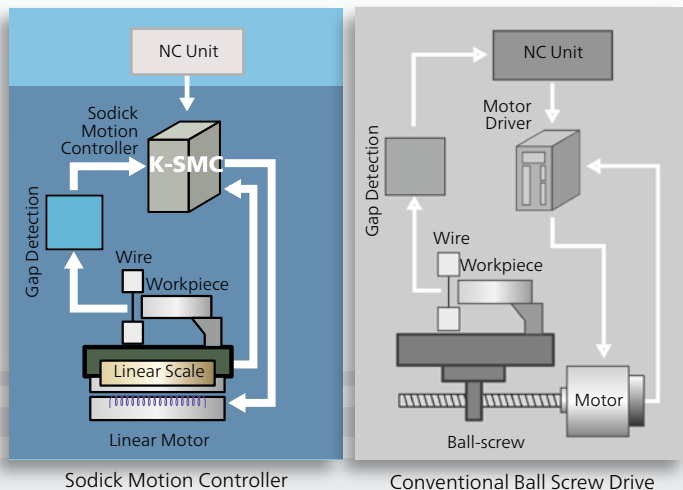

Tech 5

Ceramic Work-zone

The AQ750L/900L/1200L/AQ1500L benefit from the use of Ceramic for critical components such as the Work Table Stands, Lower and Upper Guide Arms and the Z-Axis Quill, all of which are produced to ensure high precision machining with better electrical insulation, abrasion resistance and lightness. Ceramics are ideal for high precision EDM Machines because of their low thermal expansion coefficient (less than one third of cast iron) high rigidity and resistant against ageing.



Sodick's Intelligent Q³vic Shapes The Future Of Manufacturing

The use of 3D Solid Models has now become an essential part of the manufacturing process. The AQ750L/900L/1200L/AQ1500L Range features a powerful Control Unit compatible with 3D Solid Models. These machines provide customers with the manufacturing technologies capable of producing results which are not totally dependent on the level of skill of the operator; effectively eliminating the need for drawings and reducing the chances of human error.

Intelligent Q³vic

The LP2WH power supply comes with "Intelligent Q³vic" as standard.

This enables the operator to directly import 3D models and to extract the features to be machined within seconds. Even work pieces with complicated shapes and with different cutting heights can be programmed using only a single command. After the surfaces to be machined have been recognized an NC Programme is generated including all the cutting parameters. A full on -screen simulation is possible prior to machining.



Intelligent Q³vic Offline (Option)

All AQ Linear series machines come with "Intelligent Q³vic" on a CD ROM. This package can be run on an external PC, and allows the operator to manipulate a 3D Solid Model remotely from the machine. Furthermore, any other 2D and 3D formats can be imported allowing full offline programming. When the offline system is networked to the machine, a full simulation can be performed using "Intelligent Q³vic".




2D Form Design

With Intelligent Q³vic EDW, it is also possible to design easily shapes with different top & bottom contours, Involute gears, Coreless forms (pocket machining) and free-form curves. Furthermore it can import data created in DXF Format and output the machining programmes for wire-cut EDM.



Remote Monitoring

No need to return at night or at weekends to check the status of the machine. A standard intranet link allows operators to monitor the main functions of the machine by accessing the control remotely.

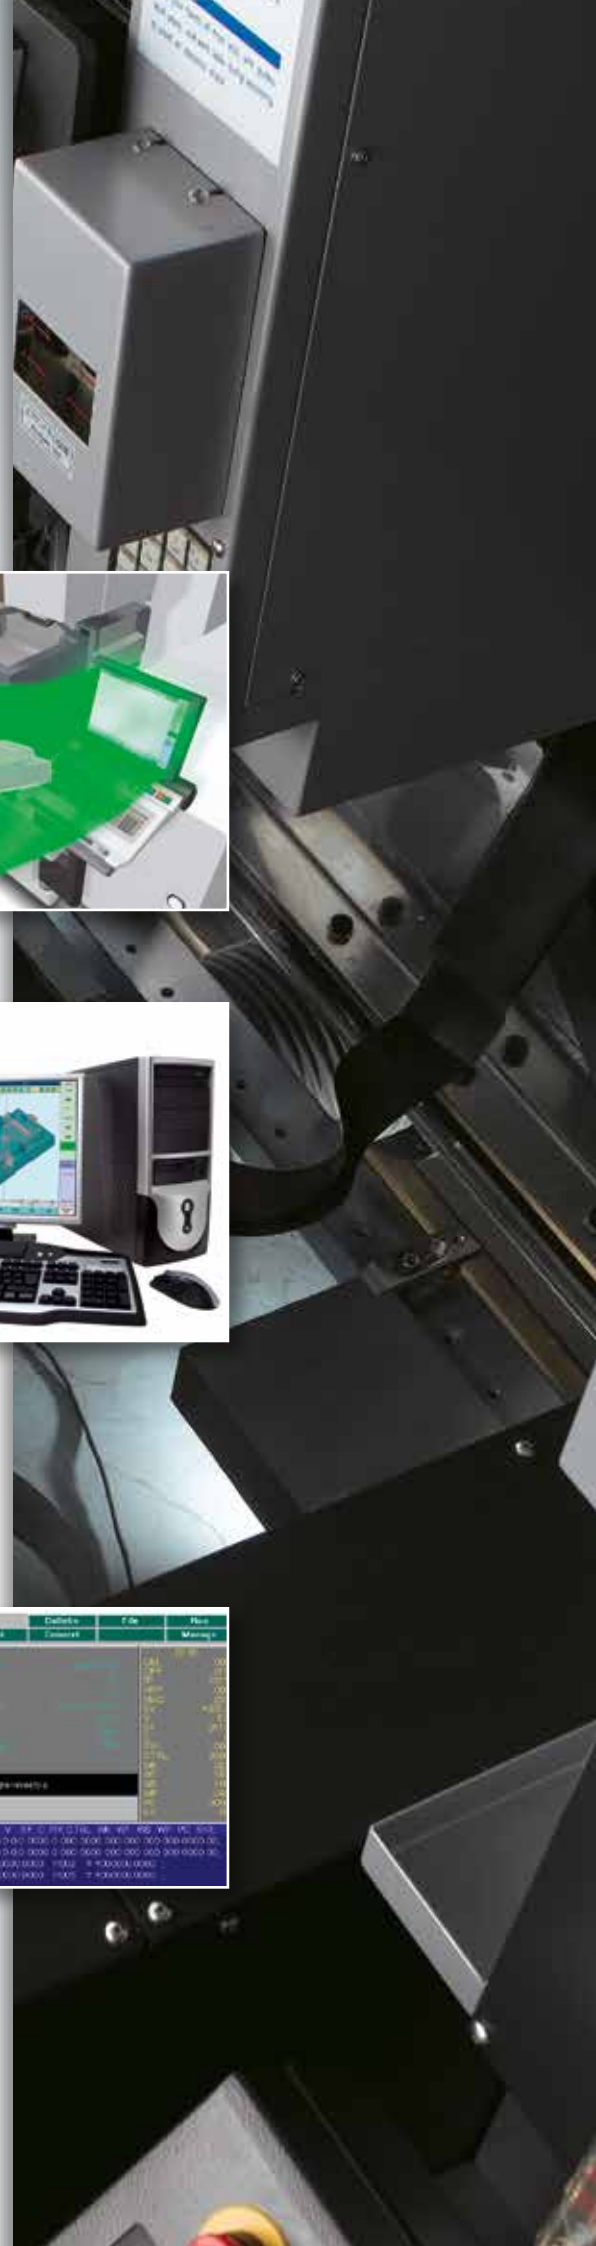

Design Features that ensure continuous and unattended production.

High Speed Generator

The LP2WH High Speed Generator is standard on the Sodick AQ Series. Both brass and coated-wire are compatible with this advanced Generator.



Jumbo Feeder

This wire supply device allows up to a 20kg wire bobbin and enables continuous machining.



Low Maintenance Tank Seal

The tank seal flushing function has been introduced to enhance the capability and reliability. The constant flushing stops the possibility build-up of debris on the rear seal.



The High Speed Automatic Wire Threader (AWT)

The High Speed Automatic Wire Threader with thermal cutting device is specifically designed for automated unattended, multi-cavity production.



Large Work Table Frame

On the AQ750L/AQ900L models multiple work-pieces can be easily clamped using the large 3 sided Table Frame. By using the supplied movable rail a 4th side can be utilized. The AQ1200L/AQ1500L models are equipped with a fixed 4 sided Table Frame



L-Cut (Wire Chopper)

The L-Cut Unit chops the ejected wire into small pieces for easy disposal



Multi Filter System

Three large capacity filters ensure efficient and economic performance and guarantee the full capability of the AQ Series during extended production.



Vertical Sliding Tank Door

An automatic vertical drop down tank door improves the efficiency of the machine and ergonomics for the operator, making setting and access to the work table as convenient as possible.



Specifications

Machine tool	AQ750L Premium	AQ750LH Premium	AQ900L Premium	AQ1200L Premium	AQ1500L Premium
Max. workpiece dimensions (W x D x H) mm	1050 x 750 x 400	1050 x 750 x 600	1200 x 900 x 400	1600 x 1200 x 400	1900 x 950 x 600
Max. workpiece weight	1500 kg	1500 kg	2000 kg	4000 kg	8000 kg
X-/Y- Z- axis travel	750 x 500 x 400 mm	750 x 500 x 600 mm	900 x 600 x 400 mm	1200 x 800 x 400 mm	1500 x 1000 x 600 mm
U x V axis travel	770 x 520 mm	770 x 520 mm	920 x 620 mm	1220 x 820 mm	1520 x 1020
Taper angle (Work. thickness 150mm)	±30°	±30°	±30°	±30°	±30°
Wire diameter	0.15 ~ 0.33 mm	0.15 ~ 0.33 mm	0.15 ~ 0.33 mm	0.15 ~ 0.33 mm	0.15 ~ 0.33 mm
Wire tension	3 ~ 23N	3 ~ 23N	3 ~ 23N	3 ~ 23N	3 ~ 23N
Max. wire speed	420 mm/sec	420 mm/sec	420 mm/sec	420 mm/sec	420 mm/sec
Distance from floor to table top	1000 mm	1000 mm	1050 mm	1200 mm	1200 mm
Machine tool dimensions (W x D x H) mm	2100 x 2860 x 2390	2760 x 2860 x 2830	2380 x 3330 x 2395	4100 x 3935 x 2510	5600 x 4435 x 2930
Machine installation dimensions	3200 x 4160 mm	3700 x 4160 mm	3500 x 4200 mm	5200 x 5085 mm	6700 x 5765 mm
Machine tool weight	5600 kg	6100 kg	8000 kg	10000 kg	15000 kg
Total power input	3-phases 50/60Hz 15KVA	3-phases 50/60Hz 15KVA	3-phases 50/60Hz 15KVA	3-phases 50/60Hz 15KVA	3-phases 50/60Hz 18KVA


Dielectric Tank	AQ750L Premium	AQ750LH Premium	AQ900L Premium	AQ1200L Premium	AQ1500L Premium
Capacity	1265 lit	1640 lit	1600 lit	3000 lit	5000 lit
Dielectric fluid filtration system	Replaceable paper filters (internal pressure)	Replaceable paper filters (internal pressure)	Replaceable paper filters (internal pressure)	Replaceable paper filters (internal pressure)	Replaceable paper filters (internal pressure)
Deionizer	Ion exchange resin (18-lit. type)	Ion exchange resin (18-lit. type)	Ion exchange resin (18-lit. type)	Ion exchange resin (18-lit. type)	Ion exchange resin (18-lit. type)

The dielectric chillers on Sodick machines contain either fluorinated greenhouse gas R410A or R407C.
 *Due to ongoing research, specifications are subject to change without prior notice

Options


Taper Flex Neo 45

Taperflex Neo 45 is available as an option for accurate large angular machining up to 45°. Taper Flex Neo 45 is easy to use and requires no special training. The option consists of three parts: High Angle Guides, a Calibration Jig and Software.

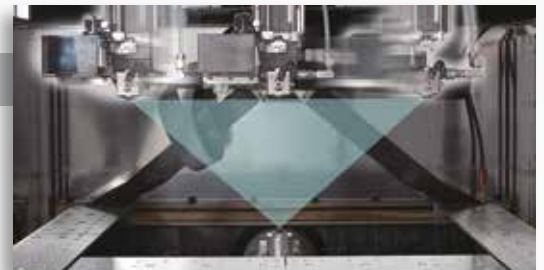

Multi Axis Control

Sodick's LP20WH is capable of controlling up to 8-Axes simultaneously. The Multi Axis Control is available as a factory-fit option.

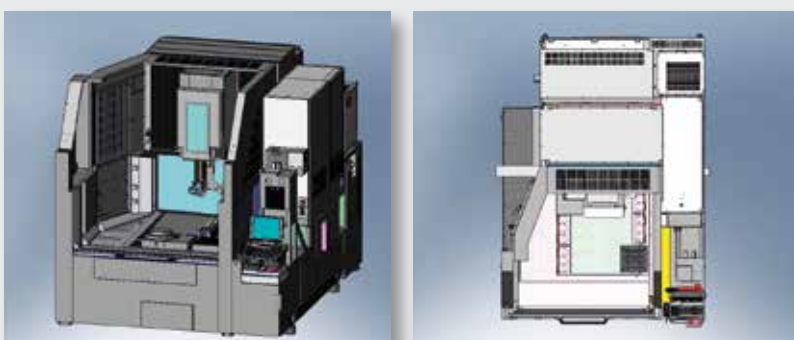

Custom Made Solutions

A cutting height option of 600 mm submerged is available on the AQ750L as a standard option and on request for the AQ1200L. The innovative machine design also allows the work-tank to be made larger or the Z Height to be increased, depending on the customer's requirement.

Sodick

Sodick Europe Ltd.

Rowley Drive, Baginton
Coventry, CV3 4FG
United Kingdom

create your future

Sodick Contact

Phone +44 (0) 24 7621 4314
email europa@sodick.eu.com
online www.sodick.org